

## Application

This product is ideal to use as floodlighting in pathway, electric power, gas station, rail way, large plant, workshop, and any other public places.



## Characteristics of performance

- Adopts famous international brand light source with stable performance, gives 20% more light over the other manufacturers.
- Long service life comes to 12,000 hours and low maintenance.
- The special device on the bottom of the lamp can allow the air get inside so that to balance the internal and external pressure differential and eliminate the water vapor condensation inside the lamp.
- The reflector with diffuse reflection function can make the light beam more gentle and, glare free.
- Mounting bracket can be adjusted to the desired angle.
- The lock screws on the lamp makes it more easy for the operator to open the cover.
- The mounting rack is optional according to customers' requirements.

## Main specification

Input Voltage	AC220V 50Hz (60Hz Optional)
Ingress Protection	IP65
Anti Corrosion Grade	WF2
Insulation Grade	I
Space Height Ratio	2.2
Leading-in cable diameter	φ 8mm - φ 10mm
Dimension	520 × 400 × 175mm
Net Weight	14Kg

## Light distribution curve

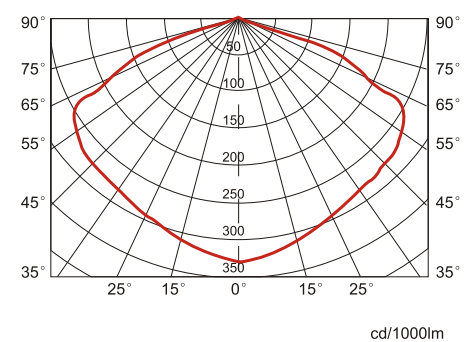

## Ordering reference

Ordering Reference	Light Source	Wattage (W)	Luminous flux (lm)	Lamp Average Life (h)
ZY8200-J250	MH	250	25,000	12,000
ZY8200-J400	MH	400	36,000	12,000
ZY8200-N250	HPS	250	27,500	30,000
ZY8200-N400	HPS	400	50,000	30,000

## Drawing of dimension (Dimensions in mm)

