

## Application


This product is designed for the power distribution room, plants, water pump centers, boiler rooms, passages, coal storage, stadium, stations etc.

## Characteristics of performance


- Famous brand light source and electrical appliance. And it is 20% brighter comparing with the other brand lamp.
- When open the upper cover, the lamp will power off automatically, making the operation safer.
- It adopts the imported advanced transparent part, ensure the lamp with gentle light, anti dazzle, and no shadow area. It can effectively avoid visual fatigue caused to operators during the operation.
- High strength housing with high quality rubber seal and power coated finish for long term use in the all kinds of humid, high temperature, corrosive, harsh environment.
- Multiple Mounting options. Customer can choose seated mounting, ceiling mounting, pendant mounting etc, according to the application.
- The guard is optional according customer requirements.

## Main specification

Input Voltage	AC220V 50Hz (60Hz Optional)
Ingress Protection	IP65
Anti Corrosion Grade	WF2
Insulation Grade	I
Space Height Ratio	2
Screw Thread	G3/4"
Leading-in cable diameter	φ 8mm - φ 10mm
Dimension	270 × 230 × 300mm
Net Weight	6Kg



## Light distribution curve

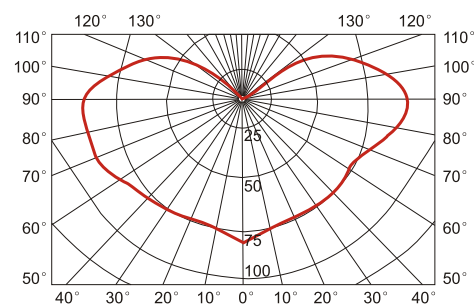

cd/1000lm

## Ordering reference

Ordering Reference	Light Source	Wattage (W)	Luminous flux (lm)	Lamp Average Life (h)
ZY8600-J70	MH	70	5,500	10,000
ZY8600-J100	MH	100	9,000	10,000
ZY8600-J150	MH	150	13,000	10,000
ZY8600-N70	HPS	70	6,000	28,500
ZY8600-N100	HPS	100	9,600	28,500
ZY8600-N150	HPS	150	16,000	28,500

## Drawing of dimension (Dimensions in mm)

