

## Application

This product is designed for the power distribution room, plants, water pump centers, boiler rooms, passages, coal storage, stadium, stations etc.

## Characteristics of performance

- Equipped with Induction lamp as light source. Save 80% on energy than incandescent lamp.
- The light source's life comes to 60,000 hours. It reduces the operating and maintenance.
- High strength die casting aluminum housing with waterproof, dust proof performance ensure the lamp can be used in all kinds of humid, corrosive harsh environment.
- It adopts the imported advanced transparent part, ensure the lamp with gentle light, anti dazzle, and no shadow area. It can effectively avoid visual fatigue caused to operators during the operation.
- Multiple Mounting options. Customer can choose seated mounting, ceiling mounting, pendant mounting etc, according to the application.
- The guard is optional according customer requirements.

## Main specification

Input Voltage	AC220V 50Hz (60Hz Optional)
Ingress Protection	IP65
Anti Corrosion Grade	WF2
Insulation Grade	I
Space Height Ratio	1.7
Screw Thread	G3/4"
Leading-in cable diameter	φ 8mm - φ 10mm
Dimension	270 × 232 × 295mm
Net Weight	3.6Kg


IP65

-40°C

+50°C



## Light distribution curve

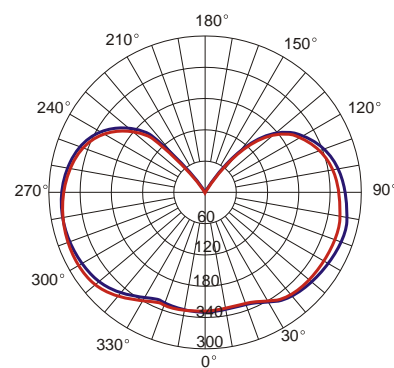

— C0° /180°  
— C90° /270°  
Cd/1000lm

## Ordering reference

Ordering Reference	Light Source	Wattage (W)	Luminous flux (lm)	Lamp Average Life (h)
ZY8630-Y50	Induction lamp	50	4,000	60,000
ZY8630-Y85	Induction lamp	85	6,800	60,000

## Drawing of dimension (Dimensions in mm)

